

OPK



PRODUCTS DIGEST

— Japan Quality —

FOUNDED 1934



OKUDAYA GIKEN CO., LTD.

OSAKA JAPAN

ESTABLISHED 1954

HAND PALLET TRUCK SERIES


Standard Type



Ultra Low Profile Type



For Heavy Load (5tons)

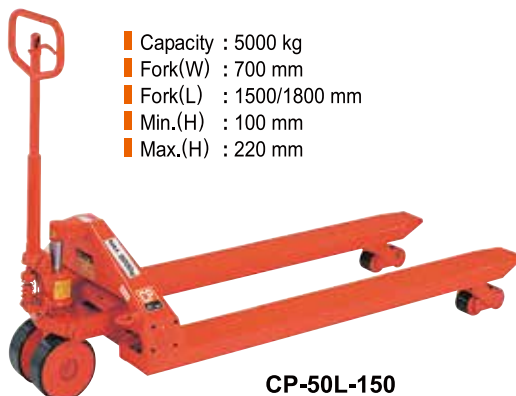

Cold Room Type



Traverse Type



HIGH CATCH SERIES

Manual Type



Battery Type



Self-propelled Type



Capacity : 500/1000 kg
 Fork(W) : 520/685 mm
 Fork(L) : 800/930/1070 mm
 Min.(H) : 85 mm
 Max.(H) : 450/700/720 mm

Capacity : 500/1000 kg
 Fork(W) : 520/685 mm
 Fork(L) : 930/1070 mm
 Min.(H) : 85 mm
 Max.(H) : 700/720 mm

Capacity : 500 kg
 Fork(W) : 520/685 mm
 Fork(L) : 930 mm
 Min.(H) : 85 mm
 Max.(H) : 720 mm



Anty^{ac} SERIES

Self-propelled Battery Pallet Truck Type



- Capacity : 1300/1600/1800/2000 kg
- Fork(W) : 620 mm
- Fork(L) : 1070 mm
- Min.(H) : 80 mm
- Max.(H) : 200 mm



High Capacity Battery Type



Self-propelled Battery Power Lifter Type



BPL

- Capacity : 990/1500 kg
- Fork(W) : 270~725/230~800 mm
- Fork(L) : 800/1000 mm
- Min.(H) : 80(97/135) mm
- Max.(H) : 1500/1400 mm

BPLW

- Capacity : 650 kg
- Fork(W) : 270~825 mm
- Fork(L) : 800 mm
- Min.(H) : 80(97) mm
- Max.(H) : 2500 mm



*Min.(H) are shown in () on the condition that the forks are put on the legs.

Light Low Lift Pallet Truck
glocal^{LL}

Glocal Low Lift Pallet Truck

- Capacity : 1300/1500 kg
- Fork(W) : 560 mm
- Fork(L) : 1070 mm
- Min.(H) : 80 mm
- Max.(H) : 200 mm



NEW

SELF-PROPELLED BATTERY PALLET TRUCK



- Capacity : 1000 kg
- Fork(W) : 580 mm
- Fork(L) : 1070 mm
- Min.(H) : 80 mm
- Max.(H) : 200 mm



GBL
Made in Japan

Global Low Lift Pallet Truck

- Capacity : 2000 kg
- Fork(W) : 580 mm
- Fork(L) : 1070 mm
- Min.(H) : 80 mm
- Max.(H) : 200 mm



TOWING TRUCK



- Max. Traction Mass : 1000 kg
- Overall Length : 1030 mm
- Overall Width : 430 mm
- Mounting Hook Height : 255-455 mm




POWER LIFTER SERIES(STANDARD TYPE)

Manual Stacker



- Capacity : 350 kg
- Fork(W) : 165~530 mm
- Fork(L) : 650 mm
- Min.(H) : 80(95) mm
- Max.(H) : 1500 mm

PL-H350-15

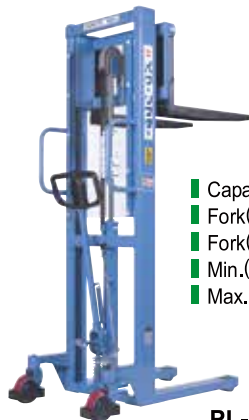

- Capacity : 400/500/650 kg
- Fork(W) : 270~575 mm
- Fork(L) : 650/800 mm
- Min.(H) : 80(95) mm
- Max.(H) : 1500 mm


**PL-H400-15L
PL-H500-15(L)
PL-H650-15**



- Capacity : 800/1000 kg
- Fork(W) : 270~725 mm
- Fork(L) : 800/1000 mm
- Min.(H) : 80(97) mm
- Max.(H) : 1500 mm


**PL-H800-15(L)
PL-H1000-15(L)**

Battery Stacker

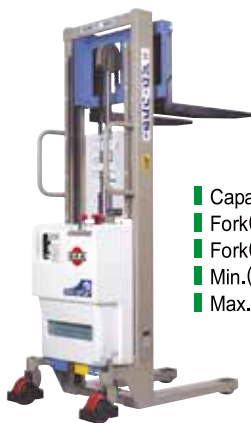


- Capacity : 350/400/500/650 kg
- Fork(W) : 165~530/270~575 mm
- Fork(L) : 650/800 mm
- Min.(H) : 80(95) mm
- Max.(H) : 1500 mm

**PL-D350-15
PL-D400-15L
PL-D500-15(L)
PL-D650-15**

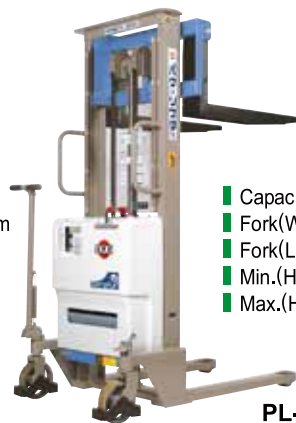

- Capacity : 800/1000 kg
- Fork(W) : 270~725 mm
- Fork(L) : 800/1000 mm
- Min.(H) : 80(97) mm
- Max.(H) : 1500 mm

**PL-D800-15(L)
PL-D1000-15(L)**

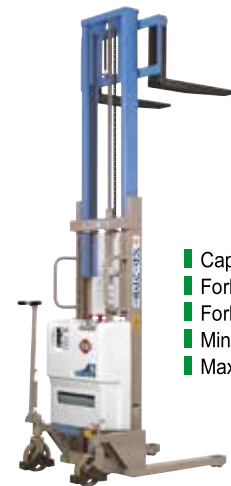

- Capacity : 350/500/650 kg
- Fork(W) : 165~640/270~775 mm
- Fork(L) : 650/800 mm
- Min.(H) : 80(95) mm
- Max.(H) : 2500 mm

**PLW-D350-25
PLW-D500-25
PLW-D650-25**

*Min.(H) are shown in () on the condition that the forks are put on the legs.

ORDER PICKER SERIES

Santo Picker



- Capacity : Table / 50 kg
- Passenger / 100 kg
- Table : (W)550×(L)500 mm
- Min.(H) : 970 mm
- Max.(H) : 2100 mm

SCP-D5-21



- Capacity : 200 kg
- Table : (W)600×(L)625 mm
- Min.(H) : 470 mm
- Max.(H) : 2730 mm

PPLW-D200-27



TILT LIFTER



RL-H50

- Capacity : 500/1000 kg
- Fork(W) : 585 mm
- Fork(L) : 800 mm
- Min.(H) : 90 mm
- Max.(H) : 905/910 mm



POWER LIFTER SERIES(SPECIAL LIFTER)

Wide Type



PL-D1000-15J

- Capacity : 200/300/400/
800/1000 kg
- Fork(W) : 165~530/270~575/
270~725/280~725 mm
- Fork(L) : 1000 mm
- Min.(H) : 80/85 mm
- Max.(H) : 1500 mm



PL-SU1000-15J

- Capacity : 800/990 kg
- Fork(W) : 270/280~725 mm
- Fork(L) : 1000 mm
- Min.(H) : 80/85 mm
- Max.(H) : 1500 mm

Jib Crane Type



PL-H500-15G

- Capacity : 80/120/200 kg
- Fork(L) : 900/960 mm
- Min.(H) : 640/570 mm
- Max.(H) : 1740/2000 mm

Reach Type



PL-H350-15R

- Capacity : 350 kg
- Lifting height : 80~1500 mm

SELF-PROPELLED BATTERY POWER LIFTER

PL-U Type



PL-U350-15

- Capacity : 350/500/650 kg
- Fork(W) : 165~530/270~575 mm
- Fork(L) : 650/800 mm
- Min.(H) : 80(95) mm
- Max.(H) : 1500 mm

PL-S Type



PL-S800-15

- Capacity : 500/650/800/990 kg
- Fork(W) : 270~725/270~775 mm
- Fork(L) : 650/800 mm
- Min.(H) : 80(95/97) mm
- Max.(H) : 1500/2500 mm



PL-SU Type



PL-SU800-15

- Capacity : 500/650/800/990/1500 kg
- Fork(W) : 270~575/270~725/
230~800 mm
- Fork(L) : 650/800/1000 mm
- Min.(H) : 80(95/97/135) mm
- Max.(H) : 1400/1500 mm

PLW-SU Type



PLW-SU650-25

- Capacity : 400/500/650/800 kg
- Fork(W) : 270~775/270~825 mm
- Fork(L) : 650/800/1000 mm
- Min.(H) : 80(95/97) mm
- Max.(H) : 2500 mm

*Min.(H) are shown in () on the condition that the forks are put on the legs.

SANTO CAR SERIES

Table (Standard) Type



SC-4-12-A

- Capacity : 200/400 kg
- Table : (W)540/600×
(L)600/650 mm
- Min.(H) : 160 mm
- Max.(H) : 800/1150 mm

Table (Low Profile) Type



SC-4-8L-A

- Capacity : 200/400 kg
- Table : (W)540/600×
(L)600/650 mm
- Min.(H) : 95 mm
- Max.(H) : 730/1080 mm



Rubber Wheel Available
(Except 1500mm Lifting Type)

Fork Type



SC-4-8F-A

- Capacity : 200/400 kg
- Fork(W) : 160~515/215~570 mm
- Fork(L) : 600/650 mm
- Min.(H) : 80(95) mm
- Max.(H) : 720/1070 mm

1500mm Lifting Height Type



SC-4-15

- Capacity : 400 kg
- Table : (W)600×(L)650 mm
- Fork : (W)215~570×(L)650 mm
- Min.(H) : 80(95)/95/160 mm
- Max.(H) : 1500/1510/1580 mm



SC-D4-15F

- Capacity : 400 kg
- Table : (W)600×(L)650 mm
- Fork : (W)215~570×(L)650 mm
- Min.(H) : 80(95)/95/160 mm
- Max.(H) : 1500/1510/1580 mm

Battery Type



SC-D4-12-A

- Capacity : 200/400 kg
- Table : (W)540/600×(L)600/650 mm
- Fork : (W)160~515/215~570×
(L)600/650 mm
- Min.(H) : 80(95)/95/160 mm
- Max.(H) : 720/730/800/1070/
1080/1150 mm

*Min.(H) are shown in () on the condition that the forks are put on the legs.

Roll (SR) Type



SC-2-8SR-1

- Capacity : 200 kg
- Roller(W): 480 mm
- Roller(Φ) : 60 mm
- Min.(H) : 200 mm
- Max.(H) : 840/1190 mm



Roll (R) Type



SC-4-8R-1

- Capacity : 200/400 kg
- Roller(W): 400/550 mm
- Roller(Φ) : 55/76 mm
- Min.(H) : 200/245 mm
- Max.(H) : 840/885/1190/1235 mm

Lifter for Roll Reversal



PL-D650-15RC

- Capacity : 300 kg
- Roll
Diameter : $\varnothing$ 300~ $\varnothing$ 800

LIFT TABLE SERIES (CADDIE)



Manual Type



LTX-H100-6

- Capacity : 100 kg
- Table : (L)550×(W)350 mm
- Min.(H) : 210 mm
- Max.(H) : 600 mm



LTX-H150-7
(Foldable)

- Capacity : 150 kg
- Table : (L)700×(W)400 mm
- Min.(H) : 210 mm
- Max.(H) : 740 mm



LTX-H250-8

- Capacity : 250 kg
- Table : (L)800×(W)500 mm
- Min.(H) : 245 mm
- Max.(H) : 850 mm



LTX-H550-9L

- Capacity : 550 kg
- Table : (L)900×(W)600 mm
- Min.(H) : 330 mm
- Max.(H) : 980 mm

Leveler Type



LTX-H800-10

- Capacity : 800 kg
- Table : (L)1000×(W)600 mm
- Min.(H) : 340 mm
- Max.(H) : 1070 mm




LTX-WH300-15

- Capacity : 300 kg
- Table : (L)900×(W)600 mm
- Min.(H) : 410 mm
- Max.(H) : 1500 mm



LTX-B200-7

- Capacity : 100~200 kg
- Table : (L)800×(W)500 mm
- Min.(H) : 370 mm
- Max.(H) : 770 mm



Battery Type



LTX-D550-9L

- Capacity : 550/800 kg
- Table : (L)900/1000×(W)600 mm
- Min.(H) : 330/340 mm
- Max.(H) : 950/1040 mm



LTX-U550-9L

- Capacity : 550/800 kg
- Table : (L)900/1000×(W)600 mm
- Min.(H) : 330/340 mm
- Max.(H) : 950/1040 mm

Low Profile Type



LTX-H200L-6

- Capacity : 200/400 kg
- Table : (L)800×(W)500 mm / (L)900×(W)600 mm
- Min.(H) : 85/87 mm
- Max.(H) : 600 mm

LIFT TABLE SERIES(COTEE)

LT-S Type



LT-S10-0407

- Capacity : 100/250 kg
- Table : (W)400/520×
(L)650/720/850 mm
- Min.(H) : 80/150/200 mm
- Max.(H) : 580/650/1050 mm

Options



LT-S25-0509B
(Bellows-type Cover)

LT-E Type



LT-E100-0813

- Capacity : 200-1000 kg
- Table : (W)460-1000×
(L)650-2000 mm
- Min.(H) : 130-235 mm
- Max.(H) : 530-1510 mm

LT-F Type



LT-F200-0712

- Capacity : 2000/3000 kg
- Table : (W)700/1000×
(L)1200/1620/2000 mm
- Min.(H) : 180/205/215/220/270 mm
- Max.(H) : 1000/1120/1135/1465/1520 mm

STAINLESS STEEL SERIES

DRUM HANDLER

Pallet Truck



CPFS-15S-107-A

- Capacity : 1000/1500/2000 kg
- Fork(W) : 470/520/
600/685 mm
- Fork(L) : 850/1000/
1070/1220 mm
- Min.(H) : 65/80 mm
- Max.(H) : 185/200 mm

Power Lifter



PL-H350-15SU

- Capacity : 350 kg
- Fork(W) : 165~530 mm
- Fork(L) : 650 mm
- Min.(H) : 80(95) mm
- Max.(H) : 1500 mm

- Capacity : 300 kg
- Turn : 180°
- Lifting(H) : 0-1000 mm(135°TURN)
1250 mm(90°TURN)



PL-H300-12DT

DRUM PORTER

Lift Table



LTX-H250-8SU

- Capacity : 150/250/500 kg
- Table : (W)700×(L)400/
(W)800×(L)500/
(W)900×(L)600 mm
- Min.(H) : 210/245/330 mm
- Max.(H) : 740/850/980 mm

Santo Car



SC-2-12SU

- Capacity : 200 kg
- Table : (W)540×
(L)600 mm
- Min.(H) : 160 mm
- Max.(H) : 800/1150 mm



CD-250

- Capacity : 250 kg
- Lifting(H) : 330 mm



DL-300-30

- Capacity : 300 kg
- Lifting(H) : 230/
400mm

*Min.(H) are shown in () on the condition that the forks are put on the legs.

Created by Highly Experienced Hydraulic Equipment Makers.

Originality Produces Know-how



OKUDAYA GIKEN CO., LTD.

263 Tanjo, Mihara-ku, Sakai-city,
Osaka 587-0011, JAPAN.
TEL 81-723-61-7861 FAX 81-723-62-2102
E-mail: trading@opk.co.jp

URL : <http://www.opk.co.jp>



* Products with special specifications besides those with standard specifications are manufactured as well. Feel free to contact OKUDAYA GIKEN.

The specifications described in this catalog are subject to change without notice for product improvement.

* The colors of actual products may be more or less different from those printed in this catalog.

All rights reserved.



As of June 2020

GMD01-01.20.06.2S