


Allow your work safety & easy

# Power-Assisted Hand Truck PUSH CART

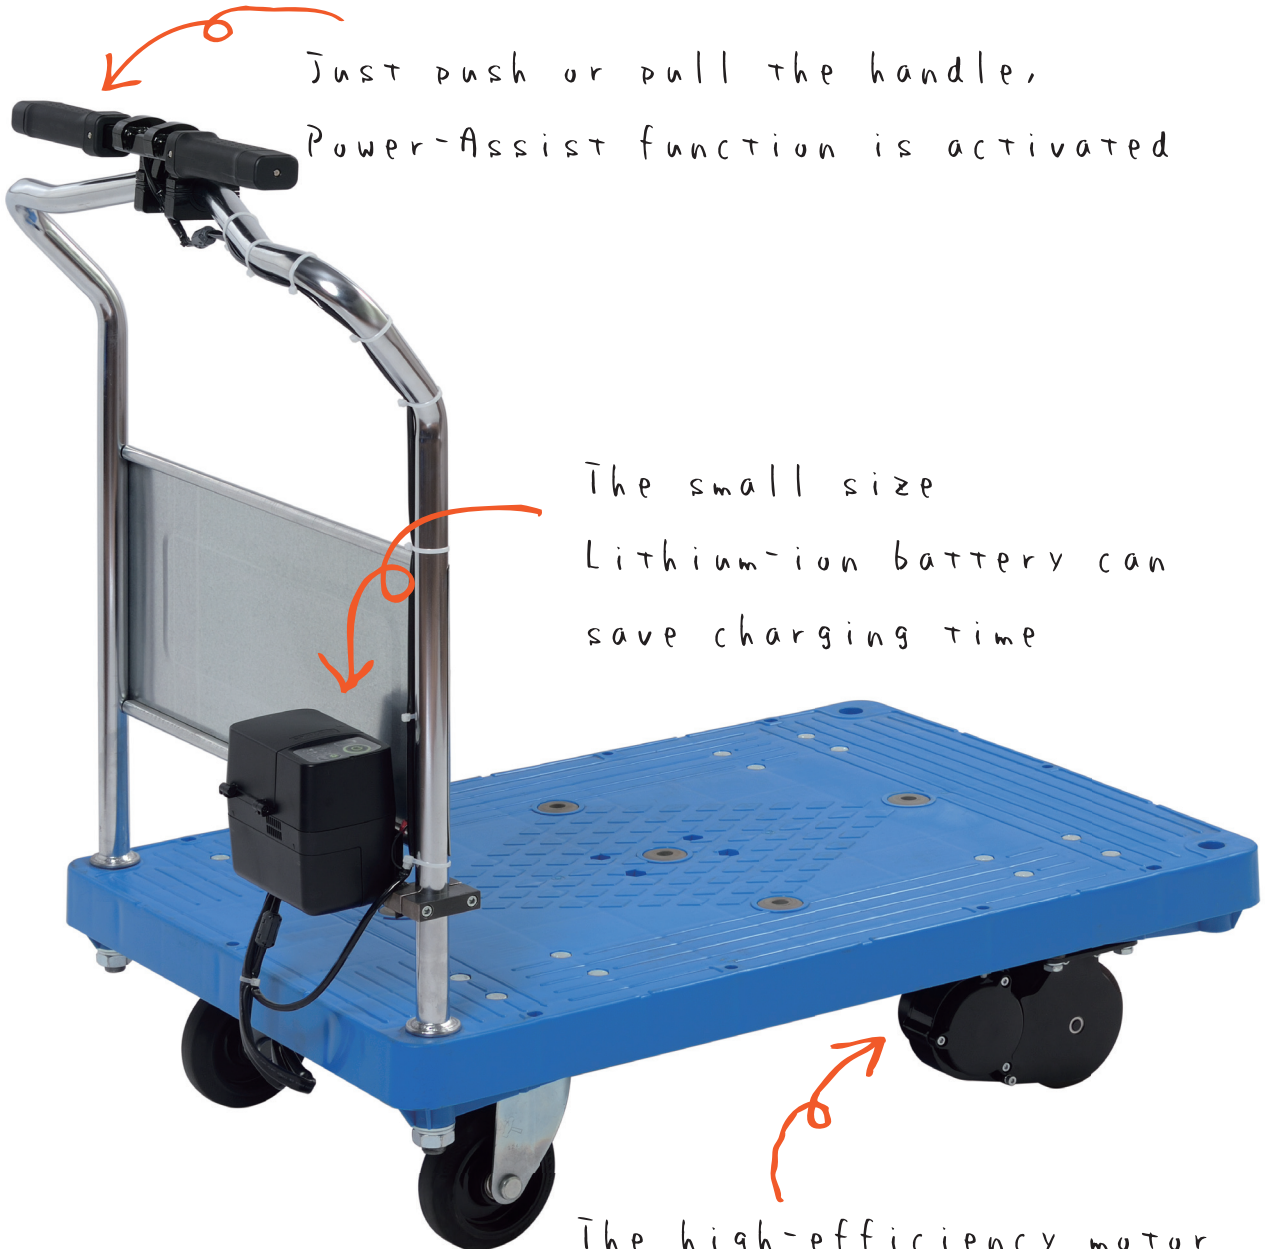

Just push or pull the handle,  
Power-Assist function is activated

The small size  
Lithium-ion battery can  
save charging time

The high-efficiency motor  
assists powerfully

## JAPAN QUALITY

FOUNDED 1934



**OKUDAYA GIKEN CO., LTD.**

ESTABLISHED 1954

OSAKA JAPAN

# Power-Assisted Hand Truck PUSH CART

## Simple and easy with Power-assist function

PUSH CART provides a comfortable work place for women and elderly workers. There is the voice guidance in Japanese, English and Chinese language.

※ It can not be changed after purchasing the product



ASP-300-S



ASP-300-SC



ASP-300-T2



Grip the handle to activate power-assist



The high efficiency motor can be energy-saving and powerfully assisted



Small size Lithium-ion battery can save charging time


STANDARD TYPE											
Specification	Maximum Capacity (kg)	Table Size(mm)			Overall length (mm)	Overall Width (mm)	Overall Height (mm)	Drive wheel Dia.φ x Width (mm)	Steering wheel Dia.φ x Width (mm)	Battery (Lithium-ion battery)	Net weight (kg)
		Length	Width	Height							
Model		A	B	C	D	E	F				
ASP-300-S	300	905	605	232	990	605	1,000	Urethane 125×27	Rubber 125×40	14.4V-2.5Ah	29

FOLDABLE HANDLE TYPE											
Model	Maximum Capacity (kg)	Length	Width	Height	Overall length (mm)	Overall Width (mm)	Overall Height (mm)	Drive wheel Dia.φ x Width (mm)	Steering wheel Dia.φ x Width (mm)	Battery (Lithium-ion battery)	Net weight (kg)
ASP-300-SC	300	905	605	232	990	605	1,000	Urethane 125×27	Rubber 125×40	14.4V-2.5Ah	30


DOUBLE DECK/TRIPLE DECK TYPE												
Model	Deck	Maximum Capacity (kg)	Table Size(mm)			Overall length (mm)	Overall Width (mm)	Overall Height (mm)	Drive wheel Dia.φ x Width (mm)	Steering wheel Dia.φ x Width (mm)	Battery (Lithium-ion battery)	Net weight (kg)
			Length	Width	Height							
ASP-300-T2	First deck	300	793	517	232	1,020	605	1,080	Urethane 125×27	Rubber 125×40	14.4V-2.5Ah	38
	Top deck		905	605	797							
ASP-300-T3	First deck	300	793	517	232	1,020	605	1,080	Urethane 125×27	Rubber 125×40	14.4V-2.5Ah	45
	Second deck		793	517	512							
	Top deck		905	605	797							

※ Table size of Multi-deck type is effective dimensions  
 ※ Automatic Battery Charger (AC 100-240V single phase)  
 ※ ◎ is available on request


■ Dimensions(ASP-300-S)




■ Dimensions(ASP-300-SC)



■ Dimensions(ASP-300-T2)



■ Dimensions(ASP-300-T3)



Created by Highly Experienced Hydraulic Equipment Makers.

**Originality Produces Know-how**



**OKUDAYA GIKEN CO., LTD.**

263 Tanjo, Mihara-ku, Sakai-city, Osaka 587-0011, JAPAN.  
 TEL 81-723-61-7861 FAX 81-723-62-2102

URL : <http://www.opk.co.jp>



**As of December 2023**

All rights reserved.

\* Products with special specifications besides those with standard specifications are manufactured as well. Feel free to contact OKUDAYA GIKEN.  
 The specifications described in this catalog are subject to change without notice for product improvement.  
 \* The colors of actual products may be more or less different from those printed in this catalog.