


— Japan Quality —

Santo Car

NEW Lineup

NEW 1500mm Lifting Height

- Lifting higher than other Santo Car
Higher Lifting height is now available
 - Compact and light design for smaller turning radius (*)
 - Guard Panel for Safety
- (*) Compare with stackers

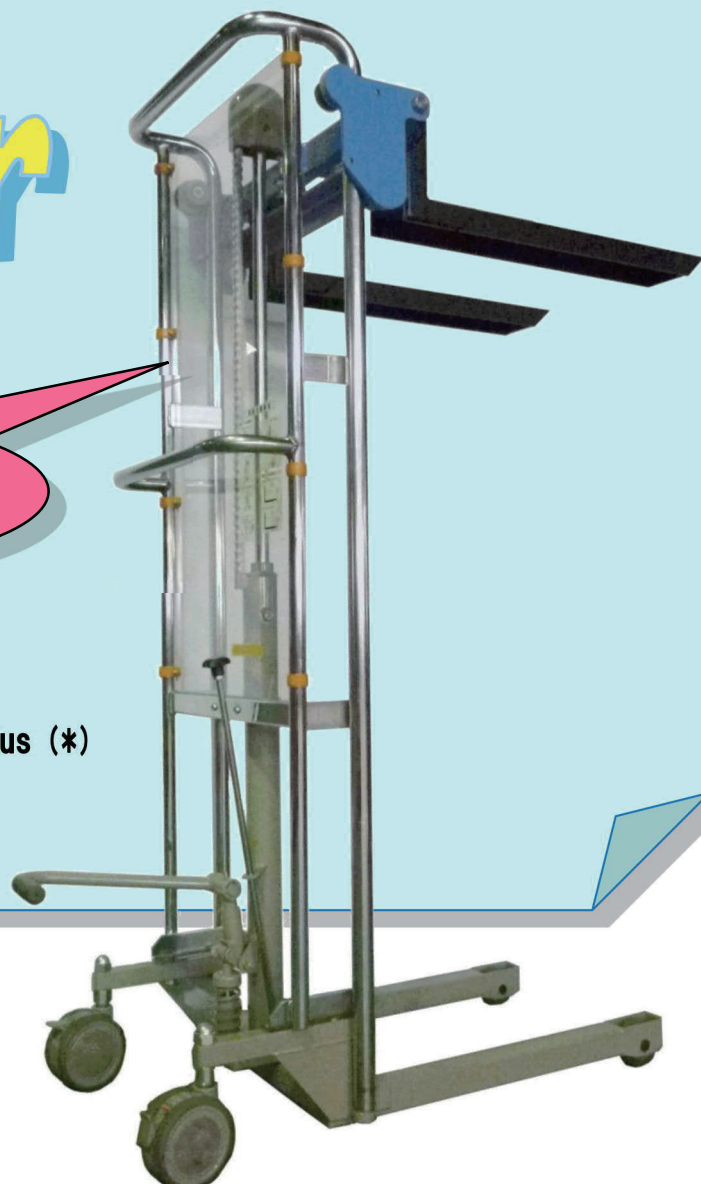

Patent Pending

■ Manual Type Santo Car

Specifications	Capacity	Min. H	Max. H	Table/Fork Size (mm)			Overall Length (mm)	Overall Width (mm)	Overall Height (mm)	Steering Wheel (mm)	Load Wheel (mm)	Power Source	Number of Lifting Times	Net Weight (kg)
Model	(kg)	(mm)	(mm)	Load Center	Width	Length								
SC-4-15	400	160	1580	350	600	650	1060	600	1765	Double Wheel Elastomer 130 x 65	Urethane 130 x 40	Hydraulic Pump Pedal	69 (23)	81
SC-4-15L		95	1510	300			215-570				1095			Urethane 80 x 38
SC-4-15F		80 (95)	1500		1140			605						

*The numbers in () in the number of lifting times denote the quick lift revolutions when there is no load.

*The number in () for minimum height is that when the forks are placed on the leg section.

■ Battery Type Santo Car

Specifications	Capacity	Min. H	Max. H	Table/Fork Size (mm)			Overall Length (mm)	Overall Width (mm)	Overall Height (mm)	Steering Wheel (mm)	Load Wheel (mm)	Battery	Lift Time (sec.)	Net Weight (kg)
Model	(kg)	(mm)	(mm)	Load Center	Width	Length								
SC-D4-15	400	160	1580	350	600	650	1060	600	1765	Double Wheel Elastomer 130 x 65	Urethane 130 x 40	DC12V 40AH/5HR	10-18	115
SC-D4-15L		95	1510	300			215-570				1095			Urethane 80 x 38
SC-D4-15F		80 (95)	1500		1140			605						

*The battery charger is built in with automated recharging. (AC 200-240V)

*The number in () for minimum height is that when the forks are placed on the leg section.



Originality Produces Know-how

OKUDAYA GIKEN CO., LTD.

285 Tanjo, Mihara-ku, Sakai-city,

Osaka 587-0011, JAPAN.

TEL: 81-72-361-7861 FAX: 81-72-362-2102

URL: <http://www.opk.co.jp>

